


Homework #11: ECE 461/661


Bode Plots. Nichols charts and gain compensation. Due Monday, November 23rd

Bode Plots

1) Determine the system, $G(s)$, with the following gain vs. frequency

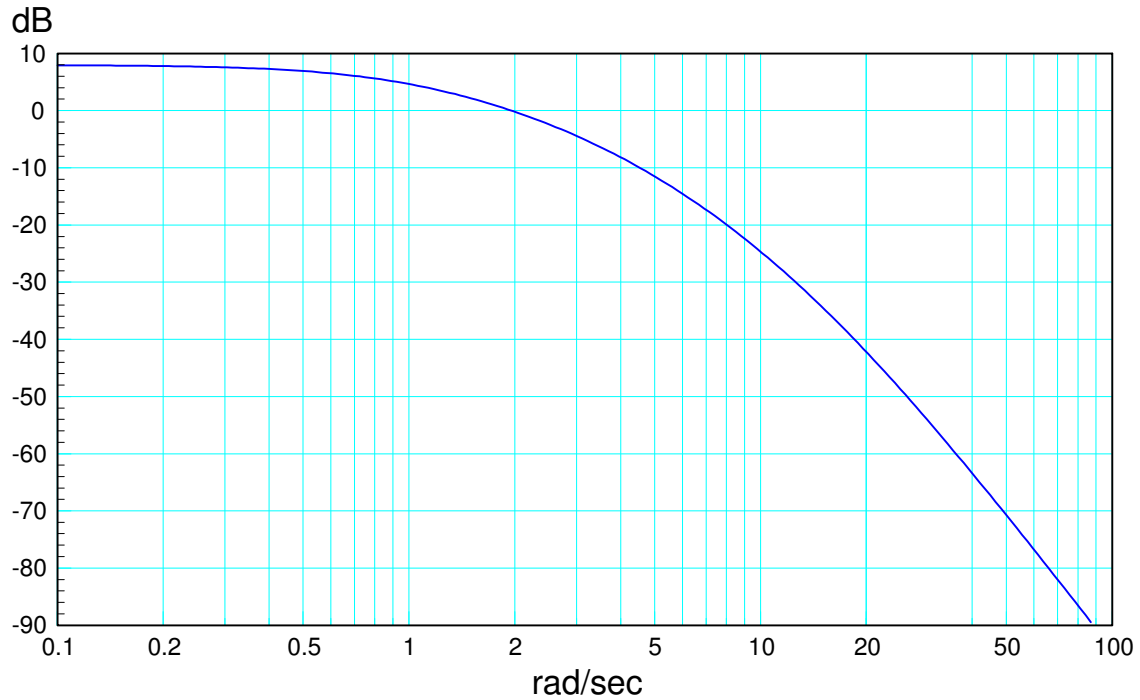

2) Determine the system, $G(s)$, with the following gain vs. frequency

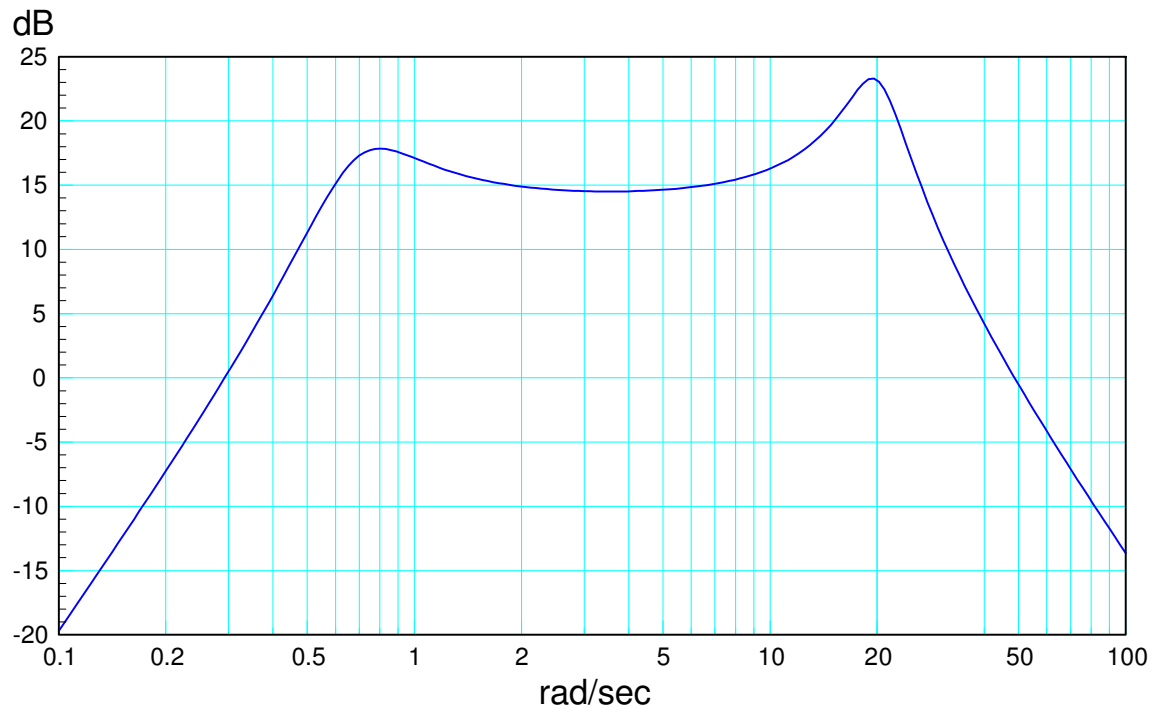

Nichols Charts

3) The gain vs. frequency of a system is measured

w (rad/sec)	1	2	3	4	5	6
Gain (dB)	4.63	-0.21	-4.45	-8.17	-11.51	-14.55
Phase (deg)	-67.6	-107.0	-133.67	-154.08	-170.63	184.51

Using this data

- Transfer it to a Nichols chart
- Determine the maximum gain that results in a stable system
- Determine the gain, k , that results in a maximum closed-loop gain of $M_m = 1.5$

4) Assume

$$G(s) = \left(\frac{1.4427}{(s+0.1617)(s+1.04)(s+2.719)(s+5.05)} \right)$$

Find $G(j\omega)$ using Matlab (or similar program). With this data,

- Draw a Nichols chart
- Determine the maximum gain that results in a stable system
- Determine the gain, k , that results in a maximum closed-loop gain of $M_m = 1.5$

5) Assume a 500ms delay is added

$$G(s) = \left(\frac{1.4427}{(s+0.1617)(s+1.04)(s+2.719)(s+5.05)} \right) e^{-0.5s}$$

Find $G(j\omega)$ using Matlab (or similar program). With this data,

- Draw a Nichols chart
- Determine the maximum gain that results in a stable system
- Determine the gain, k , that results in a maximum closed-loop gain of $M_m = 1.5$